

REFERENCE & TECHNICAL DATA

Table of Contents

GEAR REFERENCE GUIDE	2 - 13	MILITARY SPECIFICATIONS & MANUFACTURING TOLERANCES	23
TABLE OF PITCH DIAMETERS		MATERIAL SPECIFICATIONS	24
6 TO 70 TEETH	14		
71 TO 135 TEETH	15		
136 TO 197 TEETH	16		
GEAR WEAR & LUBRICATION	17		
GEAR MOUNTING	18		
BEARING TOLERANCES	19 - 20		
METRIC CONVERSIONS & QUALITY SPECIFICATIONS	21		
DRILL & TAP REFERENCE DATA	22		
MECHANICAL PROPERTIES	22		

GEAR REFERENCE GUIDE

WM Berg manufactures several styles of gears. Each gear has and serves its own particular application. Listed below are brief descriptions and application notes for the variety of available styles. Further information can be obtained from numerous gear and mechanical design handbooks, or by contacting our engineering department.

Gear Types

Spur Gears are the most recognized style of gear. Spur gears are used exclusively to transmit rotary motion between parallel shafts, while maintaining uniform speed and torque. The involute tooth form, being the simplest to generate, permits high manufacturing tolerances to be attained.

Internal Gears, unlike spur gears, have teeth cut on the inside diameter (I.D.) of the gear blank. They are generally stronger and more efficient than the mating pinion gear. The pitch diameter (P.D.) of the internal gear must be at least 1.5 times the P.D. of the mating pinion. If this condition is not met, interferences between the tips of the teeth will occur. Internal gears provide the designer with the ability to achieve higher contact and drive ratios than standard spur gears at shorter center distances. They also enable a velocity change without a directional change. This would require an idler gear with standard spurs.


Helical Gears are similar to spur gears with the exception that the teeth are cut at an angle to the axis of the shaft (helix angle). The helix cut creates a wider contact area enabling higher strengths and torques to be achieved. Though helical gearsets operate quieter and smoother than spur gears, they are slightly less efficient. Helical gears can run on parallel shafts or may be offset as much as the helix angle will permit. Axial thrust loads are developed during operation and must be considered when selecting bearings and mounting arrangements.

Gear Racks are best described as spur gears of infinite pitch radius. They will translate rotary motion to linear motion (rack driven by pinion) and vice versa. Gear racks will mate pinions of the same pitch.

Anti-Backlash Gears are the most widely used and most inexpensive method of eliminating the inaccuracies encountered in low torque gear trains, where precise positioning is essential to an application.

The split gear design incorporates springs, which force the floating gear in a direction opposite the rotation of the fixed gear, effectively enlarging the tooth width and overcoming the space, or backlash, between the teeth of the gear with which it is meshed.


Two types of design are available, one utilizing scissor springs (Figure 1), and the second for larger diameter gears, utilizing extension springs (Figure 2). Anti-backlash gears are stocked in aluminum or stainless steel but can be supplied in other materials or to other configurations on request.

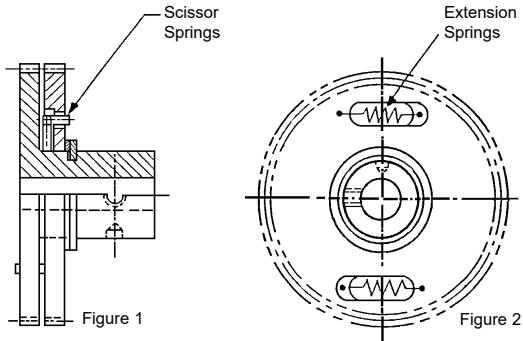


GEAR REFERENCE GUIDE

Helical Gears

Parallel Shafts

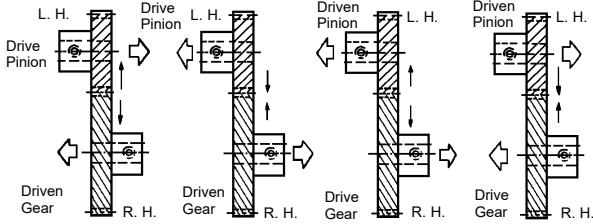

Right Angle Shafts

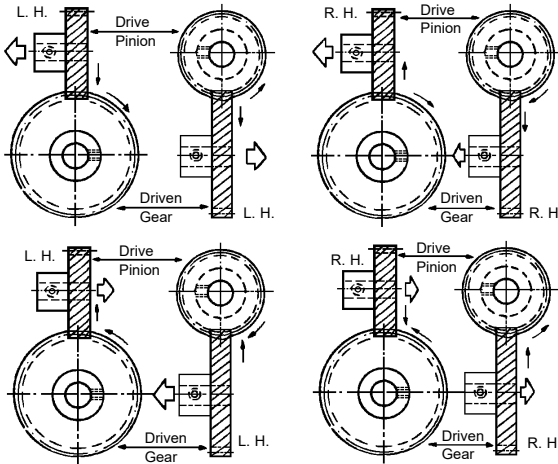

L. H. = Left Hand
 R.H. = Right Hand
 -> = Direction of Thrust
 Special helical gears cut to order.

Bevel Gears are used exclusively to transmit rotary motion between intersecting shafts. Though commonly seen in right angle drives, bevel gears can be cut to drive any angle. A cross section of the gear tooth reveals a profile similar to a spur gear. However, as the tooth is generated, the cross section decreases the closer it gets to the center of the gear. Bevel gear sets will produce axial thrust loads which must be compensated for when selecting bearings and designing mounting fixtures. Bevel gears of 1:1 ratio are referred to as miter gears.

Worms & Worm Gears are the best choice of gearing when high drive reduction is required. Worm wheels resemble helical gears with the addition of a throat cut into the out diameter (O.D.) of the wheel. The throat permits the worm wheel to fully envelope the threads of the worm. Threads, not teeth, are cut on the worm. Adjusting the number of threads can achieve different ratios without altering mounting arrangements. A unique feature of worm and wheel assemblies is their ability to prohibit back driving. Certain pitches and leads of the worm will not permit the worm wheel to drive the worm. This is useful when an application requires the output to lock-up should the application operate in the opposite direction. The worm is self locking when the helix angle is less than 5°. The worm is back drivable when the helix angle is greater than 10°. Worm and worm wheel assemblies must be mounted on perpendicular, non-intersecting shafts.

GEAR REFERENCE GUIDE

While many gearing assemblies can be developed from our extensive inventory, our engineers have designed multiple styles of gearboxes that are "ready to install". Refer to the catalog for styles and selection, then contact our sales department for availability and pricing.

TABLE 1: Gear Assembly Efficiencies

TYPE	EFFICIENCY RANGE %	RATIO RANGE	PITCH LINE VELOCITY (METERS/MIN)
SPUR	97 TO 99	1:1 TO 10:1	3,000
BEVEL	97 TO 99	1:1 TO 8:1	3,000
WORM	50 TO 90	5:1 TO 400:1	7,600
HELICAL	96 TO 98	1:1 TO 8:1	3,000

Special Bore
+ .0005
Tol. - .0000

Designator	Designator	Designator
.0781 = B	.1873 = H	.3748 = M
.0900 = V	.1875 = HH	.3750 = MM
.0937 = D	.2405 = J	.4998 = R
.1200 = E	.2498 = K	.5000 = RR
.1248 = F	.2500 = KK	.6248 = T
.1250 = FF	.3123 = L	.6250 = TT
.1562 = G	.3125 = LL	.6871 = W

Example:

Stock Number P48S28-120 (1/4" bore to be rebored to .3748)
Specify as follows: P48S28-120-M

Table 2 lists the standard metric motor shaft and bearing bore diameters that are most commonly used.

To modify US standard bore components to metric bores, select nearest standard to designed metric bore and modify bore. Modification charge will apply.

TABLE 2: Metric Motor Shaft & Bearing Bore Diameters

U.S. Standard Bore Diameters		Standard Metric System Bores		Recommended Rebore Dimensions & Tolerances
Fractional	Decimal	mm	Metric Tolerances	
1/8	.1248 + .0005	4	H7	.1573 + .0005
3/16	.1873 + .0005	5	H7	.1966 + .0005
3/16	.1873 + .0005	6	H7	.2360 + .0005
1/4	.2498 + .0005	7	H7	.2757 + .0006
1/4	.2498 + .0005	8	H7	.3148 + .0006
5/16	.3123 + .0005	9	H7	.3541 + .0006
3/8	.3748 + .0005	10	H7	.3935 + .0006
3/8	.3748 + .0005	12	H7	.4725 + .0007
1/2	.4998 + .0005	14	H7	.5510+ .0007
1/2	.4998 + .0005	15	H7	.5907+ .0007

Other basic Berg code designators

W = Worm Wheel

H = Helical Gears

M = Miter & Bevel Gears

R = Racks Spur

S = Shafting

AP = Anti-backlash Pin Hub

AC = Anti-backlash Clamp Hub

PH = Pin Hub

CH = Clamp Hub

CG = Clamps - Gears

NOTE: Most gears as specified by the Berg numbering system are stock. Any others, not listed in our catalogs, are considered specials and are gears cut to order using basic stock blanks.

All prices and quantity discounts are available on request. No exchanges or returns are expected on special non-stock parts as all such parts are made to your particular specification and have no resale value.

GEAR REFERENCE GUIDE

Gear Tooth Strength

Many factors must be considered when designing a gear train. The information listed on this page should be used as a general guideline for your application. We recommend consulting our engineering department if more critical strength calculation is required.

When a gear train is transmitting motion, it is safe to assume that all of the load is being carried by one tooth. This is because as the load approaches the end of the tooth, where the bending force would be the greatest, a second tooth comes into mesh to share the load. Simple results can be obtained from the Lewis bending strength equation.

$$W_t = \frac{SFY}{D.P.}$$


W_t = Maximum transmitted load (N)

S = Maximum bending tooth stress (taken as 1/3 of the tensile strength), see Mechanical Properties table

F = Face width of gear (mm)

D.P. = Diametral Pitch = 1/module (for equation only)

Y = Lewis Factor



NOTE: The maximum bending tooth stress (S) is valid for well lubricated, low shock applications. For high shock, poorly lubricated applications, the safe stress could be as low as $.025S$. If your design calls for an unfriendly environment for gears, you might want to lower S to assure a reasonable amount of gear life.


LEWIS FACTOR - Y	NO. OF TEETH	14 1/2° INVOLUTE	20° INVOLUTE
	10	0.176	0.201
11	0.192	0.226	
12	0.210	0.245	
13	0.223	0.264	
14	0.236	0.276	
15	0.245	0.289	
16	0.255	0.295	
17	0.264	0.302	
18	0.270	0.308	
19	0.277	0.314	
20	0.283	0.320	
22	0.292	0.330	
24	0.302	0.337	
26	0.308	0.344	
28	0.314	0.352	
30	0.318	0.358	
32	0.322	0.364	
34	0.325	0.370	
36	0.329	0.377	
38	0.332	0.383	
40	0.336	0.389	
45	0.340	0.399	
50	0.346	0.408	
55	0.352	0.415	
60	0.355	0.421	
65	0.358	0.425	
70	0.360	0.429	
75	0.361	0.433	
80	0.363	0.436	
90	0.366	0.442	
100	0.368	0.446	
150	0.375	0.458	
200	0.378	0.463	
300	0.382	0.471	
RACK	0.390	0.484	

GEAR REFERENCE GUIDE

TABLE 3: Gear Tooth Proportions

MODULE	CIRCULAR PITCH	CIRCULAR THICKNESS	ADDENDUM	DEDENDUM	WORKING DEPTH	WHOLE DEPTH
1.5	4.712	2.356	1.5	2.1	3.0	3.6
1.25	3.927	1.963	1.25	1.75	2.5	3.0
1.0	3.142	1.571	1.0	1.4	2.0	2.4
0.8	2.513	1.257	0.8	1.12	1.6	1.92
0.6	1.885	0.942	0.6	0.84	1.2	1.44
0.5	1.571	0.785	0.5	0.70	1.0	1.20
0.4	1.257	0.628	0.4	0.56	0.8	0.96
0.3	0.942	0.471	0.3	0.42	0.6	0.72
0.25	0.785	0.393	0.25	0.35	0.5	0.60

Gear Terms & Abbreviations

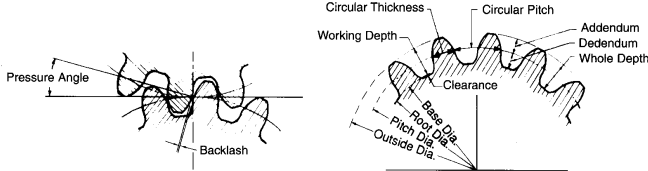

Base Diameter - (B.D.) The diameter of the circle from which the involute is generated.

Backlash - Is the amount by which the width of a tooth space exceeds the thickness of the engaging tooth of a mating gear, when both gears are at nominal center distances.

Center Distance - (C.D.) Distance between the centers of mating gears.

Circular Pitch - (C.P.) The distance, along the Pitch Circle, between corresponding points of adjacent teeth.

Circular Thickness - Thickness of tooth on pitch circle.

Diametral Pitch - (D.P.) Number of teeth in a gear having one inch pitch diameter. Ex.: A gear having 48 teeth and a 1" pitch diameter is a 48 diametral pitch.

Number of Teeth - (N)

Outside Diameter - (O.D.) Diameter measuring on tops of teeth.

Pressure Angle - (P.A.) The angle between a line tangent to the pitch circle and a line perpendicular to the tooth profile at the point of contact.

Pitch Diameter - (P.D.) Diameter of the pitch circle.

Pitch Circle - An imaginary circle, whose diameter is equal to the number of teeth divided by diametral pitch.

Testing Diameter - (T.D.) A diameter, established by inspection with a master gear of known size. It is equal to twice the difference between the tight mesh center distance, and the sum of the master gear testing diameter, divided by 2.

$$T.D. = 2 \times \left(\frac{\text{Tight Mesh Center Distance}}{\text{Center Distance}} - \frac{T.D. \text{ Master Gear}}{2} \right)$$

Module - (M) A measurement of gear tooth size obtained by dividing the pitch diameter, in mm, by the number of teeth.

GEAR REFERENCE GUIDE

TABLE 4: Rules & Formulas for Standard Full Depth Spur Gears

To Get:	Having:	Formula
MODULE (m)	THE CIRCULAR PITCH (p)	$m = p / \pi$
	THE PITCH DIAMETER (d_p) AND THE NUMBER OF TEETH (z)	$m = d_p / z$
	THE OUTSIDE DIAMETER (d_a) AND THE NUMBER OF TEETH (z)	$m = d_a / (z + 2)$
PITCH DIAMETER (d_p)	THE NUMBER OF TEETH (z) AND THE MODULE (m)	$d_p = z \times m$
	THE OUTSIDE DIAMETER (d_a) AND THE MODULE (m)	$d_p = d_a - (2 \times m)$
OUTSIDE DIAMETER (d_a)	THE NUMBER OF TEETH (z) AND THE MODULE (m)	$d_a = m \times (z + 2)$
	THE PITCH DIAMETER (d_p) AND THE NUMBER OF TEETH (z)	$d_a = d_p \times (1 + 2 / z)$
NUMBER OF TEETH (z)	THE PITCH DIAMETER (d_p) AND THE MODULE (m)	$z = d_p / m$
CIRCULAR PITCH (p)	THE MODULE (m)	$p = \pi \times m$
ADDENDUM (h_a)	THE MODULE (m)	$h_a = m$
DEDENDUM (h_f)	THE MODULE (m)	$h_f = 1.4m$
WORKING DEPTH (h')	THE ADDENDUM (h_a)	$h' = 2h_a$
WHOLE DEPTH (h)	THE ADDENDUM (h_a) AND THE DEDENDUM (h_f)	$h = h_a + h_f$
TOOTH THICKNESS (s)	THE MODULE (m)	$s = (\pi / 2) \times m$
STANDARD CENTER DISTANCE (a)	NUMBER OF TEETH (z) IN MATING GEARS AND MODULE (m)	$a = [(z_1 + z_2) / 2] \times m$
BACKLASH (j)	PRESSURE ANGLE (b) AND CENTER DISTANCE (a_s) AND STANDARD MEASURED CENTER DISTANCE (a_m)	$j = (2 \tan b) \times (a_m - a_s)$

GEAR REFERENCE GUIDE

Explanation of Class “C” Backlash

The American Gear Manufacturers Association (AGMA) publishes gear standards which are recognized and accepted throughout the country. However, many designers tend to use tolerances much tighter than necessary to “play safe” in obtaining final backlash tolerance.

This practice can be costly and is not very realistic. There is not always a benefit in paying for AGMA quality 12 or 14 gears if quality 10 will do the job just as well. Of course, there are applications where the output backlash tolerances will require the use of more precise gears but their use and added cost will be justified.

You will notice that none of the gears in our catalog show a pitch diameter tolerance. The pitch diameter is theoretical, and therefore, should not be toleranced. Tolerancing of pitch diameter will usually cause binding between mating gears at one or more points which results in excessive gear tooth wear, improper lubrication, shaft distortion and bearing overload, shortening the unit’s life and drastically reducing accuracy.

Typically, a letter — A, B, C or D — is used to define the amount of tooth thinning to assure minimum backlash at standard center distance. This letter designation, along with the AGMA quality number and diametral pitch, are used in the “center distance inspection” of a gear. There is no possibility of interference between mating gears at standard distance with this evaluation method. However, the center distance tolerance will increase or decrease backlash values depending on whether they are plus or minus. Our gears are all cut to class “C” backlash in AGMA 10 quality and 20° pressure angles.

Standard AGMA Center Distance Inspection Procedure

The following shows the excursion of an indicating device when checking the total composite error and size of a gear on a variable center distance fixture, with a master of known accuracy.

It is recommended that the tolerances for tooth thickness shown in Table 5 be used in conjunction with pin measurements in order to obtain closer correlation with a size determination made by means of a master gear.

Column 1 gives the quality class. Column 2 gives the diametral pitch range for backlash values shown in column 8. Column 3 gives the backlash values for two gears of equal tooth thickness derived from column 8. Column 4 shows the total composite error for each of the classes shown in column 1.

Column 5 shows the minimum reduction in standard tooth thickness. This value is obtained by adding one half of the minimum value of column 2 (which gives the tooth thickness reduction per gear) to one half of the total composite error converted from a radial displacement to an equivalent tooth thickness. This is accomplished by multiplying the radial displacement to an equivalent tooth thickness. This is accomplished by multiplying the radial displacement by $2 \tan \alpha$ of operating pressure angle.

Column 6 gives the maximum deduction in standard tooth thickness obtained in a similar manner.

Column 7 gives the maximum indicator reading which is obtained by converting the values in column 5 to radial displacements and subtracting from them one half of the total composite error shown in column 4.

Column 8 gives the minimum indicator reading. This is obtained by converting the values in column 6 to radial displacements and adding one half of the total composite error.

The values in columns 5 and 6 are taken through the middle of the total composite error and are therefore in closer agreement with a determination of tooth thickness made by means of pins which ignore tooth to tooth error and runout.


This procedure, along with the accompanying tables, is the method used to check all Berg precision gears. We have found this method, which takes into consideration most problems commonly encountered in gear train design (such as bind, backlash, center distance tolerance, runout, composite error, etc.) to be the one which gives the most realistic results. Of course, it does not take into account the fit of gears, shafts and bearings; these problems are dealt with later on in this section under “recommended practices”. All setups on gear checking fixtures are set up with “certified” master gears, and class “xx” accuracy carbide measuring wires are used.

TABLE 5: Tooth Thickness Tolerances for Class “C” Backlash Gears with 20° Pressure Angles

CLASS C BACKLASH							
BERG QUALITY CLASS	MODULE	BACKLASH IN MATING GEARS	TOTAL COMPOSITE ERROR	MINIMUM REDUCTION IN STD. TOOTH THICKNESS	MINIMUM REDUCTION IN STD. TOOTH THICKNESS	INDICATOR LIMITS (Gage Zeroed at Standard Pitch Radius All Values Minus)	
				(Δ Min.)	(Δ Max.)	Min.	Max.
10/DIN 7 12/DIN 5 14/DIN 3	1.5 to 0.5	.025 - .050	PER AGMA OR DIN STANDARD	0.023	0.036	0.018	0.061
				0.018	0.030		0.048
				0.015	0.028		0.041
10/DIN 7 12/DIN 5 14/DIN 3	0.4 to 0.25	.020 - .038		0.018	0.028	0.013	0.051
				0.013	0.023		0.038
				0.010	0.020		0.033

GEAR REFERENCE GUIDE

Typical Inspection Tape for a 48 D.P., 20° P.A. Quality 10C Gear

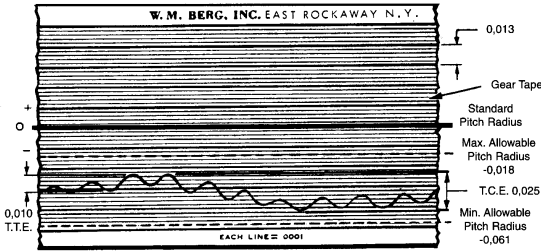

Recommended Practices

When specifying materials, it's recommended to have stainless steel pinions and aluminum mating gears. This is because pinions typically rotate through more cycles, thus experiencing greater tooth wear. Meshing stainless steel pinion with an aluminum gear tends to minimize this wear. The face widths of pinions are usually wider than face widths of mating gears to ensure full face contact without critical adjustment.

Where minimum backlash is a factor, it is important that fits between the bore of gears, inside diameter of bearings, and the outside diameter of shafting be held as close as possible. The accuracy of precision gears is lost unless these fits are held closely. This means that a form of selective fitting must be used because it is too costly, if not impossible, to hold tolerances that will allow perfect fit assembly. The extent of this selective fitting is determined by the accuracy requirements of the finished assembly.

Factors That Control Backlash

- Precision class of gears
- Center distance tolerance
- Type of fit between gears, shafts & bearings
- Precision accuracy of bearings
- Straightness & adequate support of shafts

It is important when drilling gears to shafts that the shafts be properly supported. Failure to do so can result in bending shafts with the resultant runout conditions.

NOTE: Gears with 14 1/2° pressure angle will not mesh properly with gears of 20° pressure angle.

It is imperative that the gears are not damaged in handling. Our gears are packaged to avoid handling damage. If they can be left in this package until used the danger should be minimized. If they are removed they should be put on tote boards and covered to prevent gears from contacting each other, and to keep them clean.

Gear Train Design

Determining appropriate backlash is a key challenge of designing fine pitch gear trains. Backlash in mating gears or in a gear train can be broken down into three basic factors:

- The AGMA quality of gears, i.e. quality 10, 12, or 14 (former precision standards 1, 2, or 3)
- The letter which designates backlash, i.e. "C"
- The center distance & tolerance on which these gears operate

NOTE: Berg precision stock gears are manufactured to AGMA quality 10C, unless otherwise specified.

The accepted definition of backlash is "the amount by which the width of a tooth space exceeds the tooth thickness of the engaging tooth on the pitch circles." At first glance this meaning might lead us to think that backlash is a function of the gear cutting operation only. However, the teeth of a gear contribute very little to its overall backlash value.

A complete understanding of all the elements that induce backlash is mandatory in order to properly and economically design a gear train. The following factors must be individually considered for their own parameter:

- Standard center distance
- Center distance tolerance
- Size & tolerance of mating gears
- Total composite error of gears
- Fits between bores, shafts & bearings
- Bearing accuracy
- Radial play of bearing
- Shaft straightness & alignment
- Fits between electrical &/or mechanical component pilot diameters & housing bores
- Eccentricity & radial play of electrical &/or mechanical component shafts

Each factor, except standard center distance, tends to induce a "change in the center distance" which will push together or pull apart mating gears. Consequently, this push pull action produces two backlash values, minimum at the point of tightest mesh and maximum at the point of loosest mesh.

GEAR REFERENCE GUIDE

Standard Center Distance

Standard center distance can be considered the starting point in the calculation of overall backlash values. Standard (theoretical) center distance is calculated by taking one-half (1/2) the sum of the (theoretical) pitch diameters of mating gears.

$$\text{Example: C.D.} = \frac{P.D.^1 + P.D.^2}{2}$$

Two gears having theoretical P.D.s of one inch (1") and two inches (2") respectively have a standard center distance of:

$$\text{C.D.} = \frac{1" + 2"}{2} = 1,500 \text{ C.D.}$$

Center Distance Tolerance

The problem of center distance and its tolerance is usually an extremely important area for consideration. It is important to remember that the minimum and maximum backlash values between mating gears, as outlined in the previous tables, are based on "standard" center distance mountings. Thus, if the center distance is in excess of the standard value, backlash will be increased. By the same token, if the C.D. is less than standard, backlash will be decreased. However, caution must be exercised to avoid interference between mating gears as a result of this decrease.

TABLE 6: Relationship of Change in C.D. to Backlash

ΔC (difference between standard & actual center distance)	B (backlash in mm)
0.0025	0.0018
0.0051	0.0037
0.0076	0.0055
0.0102	0.0074
0.0127	0.0092
0.0152	0.0111
0.0178	0.0130
0.0203	0.0148
0.0229	0.0163
0.0254	0.0185
0.0279	0.0203
0.0305	0.0222
0.0330	0.0240
0.0356	0.0259
0.0381	0.0277
0.0406	0.0296
0.0432	0.0314
0.0457	0.0333
0.0483	0.0352
0.0508	0.0370

The relationship of "change in center distance," which can be positive or negative depending upon C.D. tolerance, to backlash is expressed by the formula:

$$B = 2 \tan \phi \times \Delta C \quad (1)$$

In which:

B = backlash in inches

φ = pressure angle

ΔC = difference between standard (theoretical) and actual center distance (ex. $\tan 20^\circ = .36397$)

1. Standard centers + .001 tolerance

$$B = 2 \tan 20^\circ \times \Delta C$$

$$B = .72794 \times .001 = + .00073 \text{ backlash}$$

2. Standard centers - .0005 tolerance

$$B = 2 \tan 20^\circ \times \Delta C$$

$$B = .72794 \times .0005 = - .00036 \text{ backlash}$$

Backlash calculations can be divided into two categories:

- Systems where backlash is not critical
- Systems where backlash is critical & exact totals must be known

Section 1: Backlash Calculations for Non-Critical Gear Trains

Let us set up two test problems falling into the non-critical category. These two problems will deal with center distance tolerance, size and tolerance of mating gears, and total composite error of gears as they collectively contribute the greatest amount of change in center distance.

1. Two mating gears, 96 D.P. -20° P.A. having standard centers with A + .001 -.000 tolerance.

Step A: Referring to Berg quality 10 gears yield a maximum of .0015 backlash at standard centers.

Step B: With an actual center distance .001 greater than standard, an additional .0073 backlash is introduced (see Table 6).

Step C: The total probable maximum backlash would be .0015 + .00073 = .00223

2. Again two mating gears, 96 D.P. -20° P.A. must have no more than .0015 backlash measured at the loosest point of mesh (see Table 5).

Step A: Referring to Berg quality 10C gears yield a maximum of .0015 backlash at standard centers.

Step B: Actual center distance .0005 greater than standard yields an additional .00036 backlash.

Step C: The total probable backlash would be .0015 + .00036 = .00186 or .00036 above limit.

One solution would be to use quality 12C gears with the same center distance and tolerance. Again we find that the maximum backlash for quality 12C gears is .00109 and the center distance tolerance results in an additional .00036 for a total of .00145 or .00005 below limit.

GEAR REFERENCE GUIDE

Another means of overcoming this problem would be to incorporate anti-backlash or spring loaded gears. When this type of gear is used, center distance tolerance can be increased thereby reducing the cost of machining the housing. The increase in center distance when using anti-backlash gears should not exceed $0.02/D.P.$

Before deciding on either of these two possibilities, let us see what can be done using quality 10C gears.

Referring to the minimum backlash value we have $.0008$. This indicates that there is a minimum of $.0011$ clearance (see Table 6). Now, because the center distance was dimensioned $+0.0000/-0.0005$ minimum backlash would be reduced to $.00036/0.0044$ and the maximum could still be $.00109$ or $.0045$ below the limit, using Berg gears.

Section 2: Backlash Critical Gear Trains

If the previous section does not pinpoint the amount for backlash that your system will possess accurately enough for you then there are many steps that can be employed during the manufacturing process that can limit the amount of backlash in a gear train. These include cutting gears to class "D" or "E" backlash, and/or AGMA quality 12 or 14.

If backlash is critical and Berg anti-backlash gears will not suffice, consult our engineering department for how these changes will influence backlash.

Fine Pitch Gear Inspection Procedure

There has been much discussion and confusion regarding the center distance method of testing fine pitch gears. The Berg center distance method of testing uses the limits and tolerances as outlined in AGMA standards.

Figures 3 and 4 are schematic diagrams showing the basic requirements for making a center distance check. The diagrams are not to be interpreted as a recommended or suggested means of construction.

In order to make this check, the following items are required:

- Rolling Fixture
 - This fixture must incorporate provisions for accurately mounting both the master and the gear to be tested.
 - A means of accurately adjusting the weights to the correct testing pressure.
- Master Gear
 - With a maximum total composite error of $.0001$ and a standard pitch diameter of $\pm .0001$ tolerance over wires.
- Hardened or ground pins or carbide lapped pins (preferred) for mounting both the master and gear to be inspected.

Let's assume that we wish to inspect a gear having the following characteristics:

64	Diametral pitch
20°	Pressure angle
.2500	$+0.0000/-0.0002$ bore
80	Teeth
1.2500	Theoretical pitch diameter
	AGMA quality 12C

First, select the proper master gear and correct size carbide gage pin to fit this master. Since the masters we use have a $.5000 + .0001/-0.0000$ bore, we use a lapped pin of $.4995$ diameter to assure free movement without wobble.

We follow the same procedure in selecting a pin on which to mount the gear to be inspected. In this case, the lapped pin diameter would be $.24975$. The studs or pins are then mounted on the rolling fixture and caution is used to assure parallelism between the studs after mounting.

Next, set the rolling fixture to the proper testing pressure which in the case of 64 C.P. is 12 ounces, per gear standards. The testing pressure is an important factor in the rolling check to assure uniform pressure and correct mesh during the entire test.

The rolling fixture must now be set to the proper center distance by the uses of "jo-blocks". The master gear we are using has a pitch diameter of 1.5000 and the gear to be inspected has a theoretical pitch diameter of 1.2500. These two pitch diameters are added together and divided by two. This gives us a figure of 1.375. Then, add together and divide by two the pin diameters on which the master gear and the test gear ($.49995 + .24975$ respectively) are mounted. This gives us a figure of $.3749$. The figure is subtracted from the 1.375 figure to arrive at our "jo-block" setting of 1.001 ".

While holding the "jo-blocks" between the two studs or pins on the rolling fixture, the dial indicator is set to zero. This setting is the nominal or set up center distance and is made under the "testing pressure". All gears being tested must read to the minus side of the indicator otherwise interference between mating gears, with a standard distance, may result at assembly.

Because the gear to be tested is 64 diametral pitch AGMA quality 12C, we refer to our data section to obtain the dial indicators limits.

We find in column 7 that the maximum limit is $-.0005$ and in column 8 the minimum is $-.0015$. Please note that all figures given are minus values. These limits can never be exceeded or the gears will not be in tolerance.

GEAR REFERENCE GUIDE

Figure 4 shows these limits as seen on a dial indicator as well as how they would be recorded on a paper chart. For the sake of clarity, however, we have not drawn the .0001" graduation lines across the chart.

It must be remembered that although our dial limits have a range of from -.0005 to -.0015, the total composite error of an AGMA 12C gear is .0005 as shown in column 4. This means that our dial fluctuation cannot exceed .0005 within the -.0005 to -.0015 dial limit range. Should the pointer movement not exceed the .0005 maximum total composite error, the gear would be an AGMA quality 10C. This is true even though the gear is within the dial limits on a quality 12C.

Figure 3 shows the limits for AGMA quality 10C gear. The same procedure as used to test for 12C is followed. It must be remembered that the dial indicator limits and the total composite error are greater (refer to previous page for limits).

Measuring & Checking Forces

When making measurement-over-wire measurements or when checking the gears on a variable-center-distance device, the amount of force applied to the measuring wires or applied to maintain intimate contact between the gear to be checked and the master gear shall be as listed in the table below.

Module	Metric	Checking Force - N
1.5		7.23 to 8.34
1.25		7.23 to 8.34
1.0		7.23 to 8.34
0.8		5.00 to 6.12
0.6		5.00 to 6.12
0.5		5.00 to 6.12
0.4		2.78 to 3.89
0.3		1.67 to 2.78
0.25		1.95 to 2.50

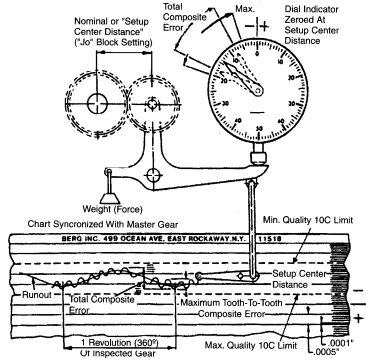


Figure 3 - AGMA Quality 10C Chart


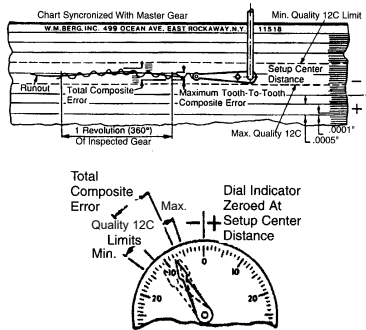


Figure 4 - AGMA Quality 12C Chart

GEAR REFERENCE GUIDE

Inertia of Gears

To obtain the inertia of 3 mm face width aluminum alloy gears up to 10 cm diameter, read directly from the graph.

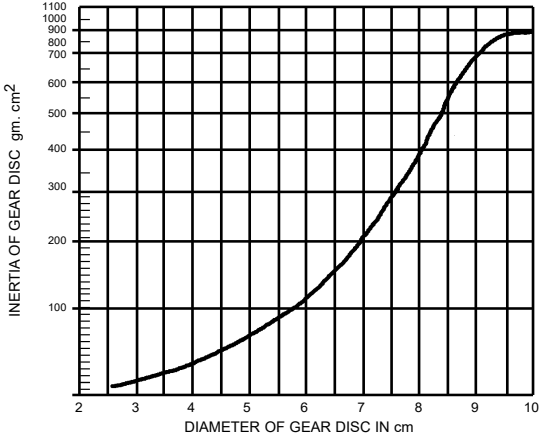

Diameter of Gear Discs

To obtain the inertia of gears with other face and/or made of stainless steel, read from the graph at the given diameter then multiply by the appropriate factor.

TABLE 7: Gear Discs in Millimeters

FACE WIDTH (mm)	3	5	6	10	13	19
MULTIPLIER	1	1.7	2	3.3	4.3	6.3

MATERIAL	ALUMINUM	STAINLESS STEEL
MULTIPLIER	1	2.9

Example: 7 cm diameter - 13 mm face width stainless steel material from graph 7 cm diameter is 208 gm cm²
 $208 \times 4 \times 2.9 = 2413 \text{ gm cm}^2$

TABLE 8: Inertia of Gear Clamps

CLAMP STK NO.	INERTIA gm cm ²	CLAMP STK NO.	INERTIA gm cm ²	CLAMP STK. NO.	INERTIA gm cm ²
CG1M-2	1.9	CG1M-17	61.6	CG3M-1	2.0
CG1M-3	2.3	CG1M-18	61.6	CG3M-2	2.0
CG1M-9	8.9			CG3M-3	2.0
GG1M-10	11.8	CG2M-1	2.0	CG3M-4	4.0
CG1M-12	8.9	CG2M-4	2.0	CG3M-5	4.0
CG1M-13	11.8	CG2M-2	2.9	CG3M-6	4.0
CG1M-14	32.4	CG2M-5	2.9	CG3M-7	5.0
CG1M-15	61.6	CG2M-3	5.0	CG3M-8	5.0
CG1M-16	32.4	CG2M-6	5.0	CG4M-9	5.0

TABLE OF PITCH DIAMETERS

TABLE 9: Pitch Diameters 6 to 70 Teeth

Outside diameter = 2M = P.D. (pitch diameter is a theoretical dimension only).

NOTE: Applies to spur and bevel gears only (not to helical gears).

NO. OF TEETH	MODULE (M)									NO. OF TEETH
	1.5	1.25	1.0	0.8	0.6	0.5	0.4	0.3	0.25	
6	9.00	7.50	6.00	4.80	3.60	3.00	2.40	1.80	1.50	6
7	10.50	8.75	7.00	5.60	4.20	3.50	2.80	2.10	1.75	7
8	12.00	10.00	8.00	6.40	4.80	4.00	3.20	2.40	2.00	8
9	13.50	11.25	9.00	7.20	5.40	4.50	3.60	2.70	2.25	9
10	15.00	12.50	10.00	8.00	6.00	5.00	4.00	3.00	2.50	10
11	16.50	13.75	11.00	8.80	6.60	5.50	4.40	3.30	2.75	11
12	18.00	15.00	12.00	9.60	7.20	6.00	4.80	3.60	3.00	12
13	19.50	16.25	13.00	10.40	7.80	6.50	5.20	3.90	3.25	13
14	21.00	17.50	14.00	11.20	8.40	7.00	5.60	4.20	3.50	14
15	22.50	18.75	15.00	12.00	9.00	7.50	6.00	4.50	3.75	15
16	24.00	20.00	16.00	12.80	9.60	8.00	6.40	4.80	4.00	16
17	25.50	21.25	17.00	13.60	10.20	8.50	6.80	5.10	4.25	17
18	27.00	22.50	18.00	14.40	10.80	9.00	7.20	5.40	4.50	18
19	28.50	23.75	19.00	15.20	11.40	9.50	7.60	5.70	4.75	19
20	30.00	25.00	20.00	16.00	12.00	10.00	8.00	6.00	5.00	20
21	31.50	26.25	21.00	16.80	12.60	10.50	8.40	6.30	5.25	21
22	33.00	27.50	22.00	17.60	13.20	11.00	8.80	6.60	5.50	22
23	34.50	28.75	23.00	18.40	13.80	11.50	9.20	6.90	5.75	23
24	36.00	30.00	24.00	19.20	14.40	12.00	9.60	7.20	6.00	24
25	37.50	31.25	25.00	20.00	15.00	12.50	10.00	7.50	6.25	25
26	39.00	32.50	26.00	20.80	15.60	13.00	10.40	7.80	6.50	26
27	40.50	33.75	27.00	21.60	16.20	13.50	10.80	8.10	6.75	27
28	42.00	35.00	28.00	22.40	16.80	14.00	11.20	8.40	7.00	28
29	43.50	36.25	29.00	23.20	17.40	14.50	11.60	8.70	7.25	29
30	45.00	37.50	30.00	24.00	18.00	15.00	12.00	9.00	7.50	30
31	46.50	38.75	31.00	24.80	18.60	15.50	12.40	9.30	7.75	31
32	48.00	40.00	32.00	25.60	19.20	16.00	12.80	9.60	8.00	32
33	49.50	41.25	33.00	26.40	19.80	16.50	13.20	9.90	8.25	33
34	51.00	42.50	34.00	27.20	20.40	17.00	13.60	10.20	8.50	34
35	52.50	43.75	35.00	28.00	21.00	17.50	14.00	10.50	8.75	35
36	54.00	45.00	36.00	28.80	21.60	18.00	14.40	10.80	9.00	36
37	55.50	46.25	37.00	29.60	22.20	18.50	14.80	11.10	9.25	37
38	57.00	47.50	38.00	30.40	22.80	19.00	15.20	11.40	9.50	38
39	58.50	48.75	39.00	31.20	23.40	19.50	15.60	11.70	9.75	39
40	60.00	50.00	40.00	32.00	24.00	20.00	16.00	12.00	10.00	40
41	61.50	51.25	41.00	32.80	24.60	20.50	16.40	12.30	10.25	41
42	63.00	52.50	42.00	33.60	25.20	21.00	16.80	12.60	10.50	42
43	64.50	53.75	43.00	34.40	25.80	21.50	17.20	12.90	10.75	43
44	66.00	55.00	44.00	35.20	26.40	22.00	17.60	13.20	11.00	44
45	67.50	56.25	45.00	36.00	27.00	22.50	18.00	13.50	11.25	45
46	69.00	57.50	46.00	36.80	27.60	23.00	18.40	13.80	11.50	46
47	70.50	58.75	47.00	37.60	28.20	23.50	18.80	14.10	11.75	47
48	72.00	60.00	48.00	38.40	28.80	24.00	19.20	14.40	12.00	48
49	73.50	61.25	49.00	39.20	29.40	24.50	19.60	14.70	12.25	49
50	75.00	62.50	50.00	40.00	30.00	25.00	20.00	15.00	12.50	50
51	76.50	63.75	51.00	40.80	30.60	25.50	20.40	15.30	12.75	51
52	78.00	65.00	52.00	41.60	31.20	26.00	20.80	15.60	13.00	52
53	79.50	66.25	53.00	42.40	31.80	26.50	21.20	15.90	13.25	53
54	81.00	67.50	54.00	43.20	32.40	27.00	21.60	16.20	13.50	54
55	82.50	68.75	55.00	44.00	33.00	27.50	22.00	16.50	13.75	55
56	84.00	70.00	56.00	44.80	33.60	28.00	22.40	16.80	14.00	56
57	85.50	71.25	57.00	45.60	34.20	28.50	22.80	17.10	14.25	57
58	87.00	72.50	58.00	46.40	34.80	29.00	23.20	17.40	14.50	58
59	88.50	73.75	59.00	47.20	35.40	29.50	23.60	17.70	14.75	59
60	90.00	75.00	60.00	48.00	36.00	30.00	24.00	18.00	15.00	60
61	91.50	76.25	61.00	48.80	36.60	30.50	24.40	18.30	15.25	61
62	93.00	77.50	62.00	49.60	37.20	31.00	24.80	18.60	15.50	62
63	94.50	78.75	63.00	50.40	37.80	31.50	25.20	18.90	15.75	63
64	96.00	80.00	64.00	51.20	38.40	32.00	25.60	19.20	16.00	64
65	97.50	81.25	65.00	52.00	39.00	32.50	26.00	19.50	16.25	65
66	99.00	82.50	66.00	52.80	39.60	33.00	26.40	19.80	16.50	66
67	100.50	83.75	67.00	53.60	40.20	33.50	26.80	20.10	16.75	67
68	102.00	85.00	68.00	54.40	40.80	34.00	27.20	20.40	17.00	68
69	103.50	86.25	69.00	55.20	41.40	34.50	27.60	20.70	17.25	69
70	105.00	87.50	70.00	56.00	42.00	35.00	28.00	21.00	17.50	70

TABLE OF PITCH DIAMETERS

TABLE 10: Pitch Diameters 71 to 135 Teeth

Outside diameter = 2M = P.D. (pitch diameter is a theoretical dimension only).

NOTE: Applies to spur and bevel gears only (not to helical gears).

NO. OF TEETH	MODULE (M)									NO. OF TEETH
	1.5	1.25	1.0	0.8	0.6	0.5	0.4	0.3	0.25	
71	106.50	88.75	71.00	56.80	42.60	35.50	28.40	21.30	17.75	71
72	108.00	90.00	72.00	57.60	43.20	36.00	28.80	21.60	18.00	72
73	109.50	91.25	73.00	58.40	43.80	36.50	29.20	21.90	18.25	73
74	111.00	92.50	74.00	59.20	44.40	37.00	29.60	22.20	18.50	74
75	113.50	93.75	75.00	60.00	45.00	37.50	30.00	22.50	18.75	75
76	115.00	95.00	76.00	60.80	45.60	38.00	30.40	22.80	19.00	76
77	116.50	96.25	77.00	61.60	46.20	38.50	30.80	23.10	19.25	77
78	118.00	97.50	78.00	62.40	46.80	39.00	31.20	23.40	19.50	78
79	119.50	98.75	79.00	63.20	47.40	39.50	31.60	23.70	19.75	79
80	120.00	100.00	80.00	64.00	48.00	40.00	32.00	24.00	20.00	80
81	121.50	101.25	81.00	64.80	48.60	40.50	32.40	24.30	20.25	81
82	123.00	102.50	82.00	65.60	49.20	41.00	32.80	24.60	20.50	82
83	124.50	103.75	83.00	66.40	49.80	41.50	33.20	24.90	20.75	83
84	126.00	105.00	84.00	67.20	50.40	42.00	33.60	25.20	21.00	84
85	127.50	106.25	85.00	68.00	51.00	42.50	34.00	25.50	21.25	85
86	129.00	107.50	86.00	68.80	51.60	43.00	34.40	25.80	21.50	86
87	130.50	108.75	87.00	69.60	52.20	43.50	34.80	26.10	21.75	87
88	132.00	110.00	88.00	70.40	52.80	44.00	35.20	26.40	22.00	88
89	133.50	111.25	89.00	71.20	53.40	44.50	35.60	26.70	22.25	89
90	135.00	112.50	90.00	72.00	54.00	45.00	36.00	27.00	22.50	90
91	136.50	113.75	91.00	72.80	54.60	45.50	36.40	27.30	22.75	91
92	138.00	115.00	92.00	73.60	55.20	46.00	36.80	27.60	23.00	92
93	139.50	116.25	93.00	74.40	55.80	46.50	37.20	27.90	23.25	93
94	141.00	117.50	94.00	75.20	56.40	47.00	37.60	28.20	23.50	94
95	142.50	118.75	95.00	76.00	57.00	47.50	38.00	28.50	23.75	95
96	144.00	120.00	96.00	76.80	57.60	48.00	38.40	28.80	24.00	96
97	145.50	121.25	97.00	77.60	58.20	48.50	38.80	29.10	24.25	97
98	147.00	122.50	98.00	78.40	58.80	49.00	39.20	29.40	24.50	98
99	148.50	123.75	99.00	79.20	59.40	49.50	39.60	29.70	24.75	99
100	150.00	125.00	100.00	80.00	60.00	50.00	40.00	30.00	25.00	100
101	151.50	126.25	101.00	80.80	60.60	50.50	40.40	30.30	25.25	101
102	153.00	127.50	102.00	81.60	61.20	51.00	40.80	30.60	25.50	102
103	154.50	128.75	103.00	82.40	61.80	51.50	41.20	30.90	25.75	103
104	156.00	130.00	104.00	83.20	62.40	52.00	41.60	31.20	26.00	104
105	157.50	131.25	105.00	84.00	63.00	52.50	42.00	31.50	26.25	105
106	159.00	132.50	106.00	84.80	63.60	53.00	42.40	31.80	26.50	106
107	160.50	133.75	107.00	85.60	64.20	53.50	42.80	32.10	26.75	107
108	162.00	135.00	108.00	86.40	64.80	54.00	43.20	32.40	27.00	108
109	163.50	136.25	109.00	87.20	65.40	54.50	43.60	32.70	27.25	109
110	165.00	137.50	110.00	88.00	66.00	55.00	44.00	33.00	27.50	110
111	166.50	138.75	111.00	88.80	66.60	55.50	44.40	33.30	27.75	111
112	168.00	140.00	112.00	89.60	67.20	56.00	44.80	33.60	28.00	112
113	169.50	141.25	113.00	90.40	67.80	56.50	45.20	33.90	28.25	113
114	171.00	142.50	114.00	91.20	68.40	57.00	45.60	34.20	28.50	114
115	172.50	143.75	115.00	92.00	69.00	57.50	46.00	34.50	28.75	115
116	174.00	145.00	116.00	92.80	69.60	58.00	46.40	34.80	29.00	116
117	175.50	146.25	117.00	93.60	70.20	58.50	46.80	35.10	29.25	117
118	177.00	147.50	118.00	94.40	70.80	59.00	47.20	35.40	29.50	118
119	178.50	148.75	119.00	95.20	71.40	59.50	47.60	35.70	29.75	119
120	180.00	150.00	120.00	96.00	72.00	60.00	48.00	36.00	30.00	120
121	181.50	151.25	121.00	96.80	72.60	60.50	48.40	36.30	30.25	121
122	183.00	152.50	122.00	97.60	73.20	61.00	48.80	36.60	30.50	122
123	184.50	153.75	123.00	98.40	73.80	61.50	49.20	36.90	30.75	123
124	186.00	155.00	124.00	99.20	74.40	62.00	49.60	37.20	31.00	124
125	187.50	156.25	125.00	100.00	75.00	62.50	50.00	37.50	31.25	125
126	189.00	157.50	126.00	100.80	75.60	63.00	50.40	37.80	31.50	126
127	190.50	158.75	127.00	101.60	76.20	63.50	50.80	38.10	31.75	127
128	192.00	160.00	128.00	102.40	76.80	64.00	51.20	38.40	32.00	128
129	193.50	161.25	129.00	103.20	77.40	64.50	51.60	38.70	32.25	129
130	195.00	162.50	130.00	104.00	78.00	65.00	52.00	39.00	32.50	130
131	196.50	163.75	131.00	104.80	78.60	65.50	52.40	39.30	32.75	131
132	198.00	165.00	132.00	105.60	79.20	66.00	52.80	39.60	33.00	132
133	199.50	166.25	133.00	106.40	79.80	66.50	53.20	39.90	33.25	133
134	201.00	167.50	134.00	107.20	80.40	67.00	53.60	40.20	33.50	134
135	202.50	168.75	135.00	108.00	81.00	67.50	54.00	40.50	33.75	135

TABLE OF PITCH DIAMETERS

TABLE 11: Pitch Diameters 136 to 197 Teeth

Outside diameter = 2M = P.D. (pitch diameter is a theoretical dimension only).

NOTE: Applies to spur and bevel gears only (not to helical gears).

NO. OF TEETH	MODULE (M)									NO. OF TEETH
	1.5	1.25	1.0	0.8	0.6	0.5	0.4	0.3	0.25	
136	204.00	170.00	136.00	108.80	81.60	68.00	54.40	40.80	34.00	136
137	205.50	171.25	137.00	109.60	82.20	68.50	54.80	41.10	34.25	137
138	207.00	172.50	138.00	110.40	82.80	69.00	55.20	41.40	34.50	138
139	208.50	173.75	139.00	111.20	83.40	69.50	55.60	41.70	34.75	139
140	210.00	175.00	140.00	112.00	84.00	70.00	56.00	42.00	35.00	140
141	211.50	176.25	141.00	112.80	84.60	70.50	56.40	42.30	35.25	141
142	213.00	177.50	142.00	113.60	85.20	71.00	56.80	42.60	35.50	142
143	214.50	178.75	143.00	114.40	85.80	71.50	57.20	42.90	35.75	143
144	216.00	180.00	144.00	115.20	86.40	72.00	57.60	43.20	36.00	144
145	217.50	181.25	145.00	116.00	87.00	72.50	58.00	43.50	36.25	145
146	219.00	182.50	146.00	116.80	87.60	73.00	58.40	43.80	36.50	146
147	220.50	183.75	147.00	117.60	88.20	73.50	58.80	44.10	36.75	147
148	222.00	185.00	148.00	118.40	88.80	74.00	59.20	44.40	37.00	148
149	223.50	186.25	149.00	119.20	89.40	74.50	59.60	44.70	37.25	149
150	225.00	187.50	150.00	120.00	90.00	75.00	60.00	45.00	37.50	150
151	226.50	188.75	151.00	120.80	90.60	75.50	60.40	45.30	37.75	151
152	228.00	190.00	152.00	121.60	91.20	76.00	60.80	45.60	38.00	152
153	229.50	191.25	153.00	122.40	91.80	76.50	61.20	45.90	38.25	153
154	231.00	192.50	154.00	123.20	92.40	77.00	61.60	46.20	38.50	154
155	232.50	193.75	155.00	124.00	93.00	77.50	62.00	46.50	38.75	155
156	234.00	195.00	156.00	124.80	93.60	78.00	62.40	46.80	39.00	156
157	235.50	196.25	157.00	125.60	94.20	78.50	62.80	47.10	39.25	157
158	237.00	197.50	158.00	126.40	94.80	79.00	63.20	47.40	39.50	158
159	238.50	198.75	159.00	127.20	95.40	79.50	63.60	47.70	39.75	159
160	240.00	200.00	160.00	128.00	96.00	80.00	64.00	48.00	40.00	160
161	241.50	201.25	161.00	128.80	96.60	80.50	64.40	48.30	40.25	161
162	243.00	202.50	162.00	129.60	97.20	81.00	64.80	48.60	40.50	162
163	244.50	203.75	163.00	130.40	97.80	81.50	65.20	48.90	40.75	163
164	246.00	205.00	164.00	131.20	98.40	82.00	65.60	49.20	41.00	164
165	247.50	206.25	165.00	132.00	99.00	82.50	66.00	49.50	41.25	165
166	249.00	207.50	166.00	132.80	99.60	83.00	66.40	49.80	41.50	166
167	250.50	208.75	167.00	133.60	100.20	83.50	66.80	50.10	41.75	167
168	252.00	210.00	168.00	134.40	100.80	84.00	67.20	50.40	42.00	168
169	253.50	211.25	169.00	135.20	101.40	84.50	67.60	50.70	42.25	169
170	255.00	212.50	170.00	136.00	102.00	85.00	68.00	51.00	42.50	170
171	256.50	213.75	171.00	136.80	102.60	85.50	68.40	51.30	42.75	171
172	258.00	215.00	172.00	137.60	103.20	86.00	68.80	51.60	43.00	172
173	259.50	216.25	173.00	138.40	103.80	86.50	69.20	51.90	43.25	173
174	261.00	217.50	174.00	139.20	104.40	87.00	69.60	52.20	43.50	174
175	262.50	218.75	175.00	140.00	105.00	87.50	70.00	52.50	43.75	175
176	264.00	220.00	176.00	140.80	105.60	88.00	70.40	52.80	44.00	176
177	265.50	221.25	177.00	141.60	106.20	88.50	70.80	53.10	44.25	177
178	267.00	222.50	178.00	142.40	106.80	89.00	71.20	53.40	44.50	178
179	268.50	223.75	179.00	143.20	107.40	89.50	71.60	53.70	44.75	179
180	270.00	225.00	180.00	144.00	108.00	90.00	72.00	54.00	45.00	180
181	271.50	226.25	181.00	144.80	108.60	90.50	72.40	54.30	45.25	181
182	273.00	227.50	182.00	145.60	109.20	91.00	72.80	54.60	45.50	182
183	274.50	228.75	183.00	146.40	109.80	91.50	73.20	54.90	45.75	183
184	276.00	230.00	184.00	147.20	110.40	92.00	73.60	55.20	46.00	184
185	277.50	231.25	185.00	148.00	111.00	92.50	74.00	55.50	46.25	185
186	279.00	232.50	186.00	148.80	111.60	93.00	74.40	55.80	46.50	186
187	280.50	233.75	187.00	149.60	112.20	93.50	74.80	56.10	46.75	187
188	282.00	235.00	188.00	150.40	112.80	94.00	75.20	56.40	47.00	188
189	283.50	236.25	189.00	151.20	113.40	94.50	75.60	56.70	47.25	189
190	285.00	237.50	190.00	152.00	114.00	95.00	76.00	57.00	47.50	190
191	286.50	238.75	191.00	152.80	114.60	95.50	76.40	57.30	47.75	191
192	288.00	240.00	192.00	153.60	115.20	96.00	76.80	57.60	48.00	192
193	289.50	241.25	193.00	154.40	115.80	96.50	77.20	57.90	48.25	193
194	291.00	242.50	194.00	155.20	116.40	97.00	77.60	58.20	48.50	194
195	292.50	243.75	195.00	156.00	117.00	97.50	78.00	58.50	48.75	195
196	294.00	245.00	196.00	156.80	117.60	98.00	78.40	58.80	49.00	196
197	295.50	246.25	197.00	157.60	118.20	98.50	78.80	59.10	49.25	197

GEAR WEAR & LUBRICATION

Wear

Another factor to consider in the successful design of a gear train is tooth surface wear. It can take on many forms but always leads to reduced accuracy and loss of smooth operation. Wear can eventually cause enough deterioration to introduce dynamic forces that are strong enough to break or bend gear teeth. The most common types of wear are pitting, scuffing and scoring.

Pitting is caused by localized metal fatigue on the surface of the gear. Microscopic cracks are forced to propagate which causes small metal chunks to break off. The best ways to avoid this are:

- Reduce contact stress
- Use hardened gears
- Use proper lubrication

Scuffing is caused by small surface irregularities that can rub each other as gear teeth come into and out of mesh. It is caused by the plastic deformation of microscopic surface protrusion. The best ways to avoid scuffing are:

- Use gears that are cut to a high quality surface finish
- "Run in" with 1/2 load for the first 10 hours
- Use proper lubrication at all times

Scoring is caused by small particles in the lubrication that get caught in the meshing teeth. This causes scratches that can extend from the root to the tip. These can be quite deep. The best ways to avoid scoring are:

- Proper high quality lubrication
- Change the lubrication after the "run in" period
- Change or filter the lubrication as needed

Lubrication

Using the proper lubrication can extend the life of your gear train by a factor of 4 or more. The lubrication will form a thin layer between the teeth in contact. This will reduce all types of tooth wear which will keep your gear running smoothly. This is especially important with worm gear sets and helical gear sets as these types of gears operate with more of a sliding motion than a rolling motion (as in spur gears).

There are many lubrications that work extremely well with gear sets. The one you choose depends on your application.

For lightly loaded, low speed systems, a light coating of grease can be brushed on during assembly. The grease will not fly off or overheat, and should be replaced regularly to ensure optimal life.

For higher speed systems, an oil bath is recommended. Oil is more effective than other lubrications at dissipating heat. The gears will always be in contact with the oil, so flying off is not a problem. The oil should be replaced after the "run in" period and regularly thereafter.

Many other lubricants exist for applications in which oil and greases could present a problem. They vary greatly in price, durability, thickness, consistency and lubricity. For low torque and low speed systems where dry running is essential, you might make use of plastic gears against a metal pinion. Generally, this offers a low enough co-efficient of friction to ensure long life.

GEAR MOUNTING

There are several ways to mount a gear to a shaft. The method you choose will depend on your application. Berg supplies gears that will accommodate a variety of mounting methods. Our pin hub gears can be mounted in three ways:

1. We suggest using the set screw to secure the gear in the proper location, then using the spot drill to drill through the hub and shaft. Then the gear can be mounted with any one of a variety of pins (Berg carries a full line of pins).
2. For light load applications, you can rely solely on the set screw. This works best if the shaft is a relatively soft material so that the screw can form its own seat.
3. For precision applications, a light press fit could be appropriate. This would insure good concentricity between the gear, shaft and indirectly, the bearings. You must take precaution not to damage the gear during the press procedure.

Formula for Press Fit

$$P_{\max} = \frac{e_{\max}E}{2d} \left(1 - \left(\frac{d}{D}\right)^2\right) \quad P_{\max} = -\frac{e_{\min}E}{2d} \left(1 - \left(\frac{d}{D}\right)^2\right)$$

$$T = 1/2 p f P_{\min} l d^2$$

P = Unit pressure of max. or min. interfering surfaces (psi)

T = Torque required to slip (in lbs.)

e = Max. or min. interference (in.)

E = Modulus of elasticity of the softer material (psi), see Mechanical Properties table

d = Shaft diameter (in.)

D = Hub diameter (in.)

f = Coefficient of static friction (approximately 0.1 -0.15)

l = Length of fit (in.)


It is important to keep the maximum interfering pressure less than the yield strength in order for these formulae to remain valid. A good rule of thumb is for each 1" of diameter the interfering distance (e) should be about .001". This number tends to get smaller as d gets larger. For example, a 3" diameter uses an allowance of approximately .0025".

Our clamp hub gears allow you to securely mount a gear with the ability to reposition it as required. Consult catalog section MI to determine which clamp of our large variety will work best with your gear selection.

BEARING TOLERANCES

The Annular Bearing Engineers Committee (ABEC) has established standards that divide precision ball bearings into quality classes. For most applications, ABEC 1 or ABEC 3 bearings will offer significant accuracy. However, there are times when highly precise position is required. In these applications, ABEC 5 or ABEC 7 bearings should be specified.

This page refers to ABEC tolerances that affect the mounting dimensions of ball bearings. The following page discusses tolerances that influence the operation of the bearings.

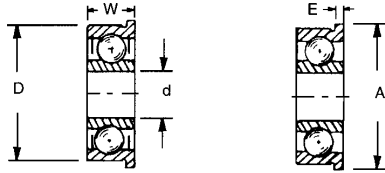

Outer Ring Tolerances

Outside Diameter (D)		Tolerance																		
		D +0.0000				W +0.0000				A				E +0.0000						
OVER	INCL.	ABEC 1	ABEC 3	ABEC 5	ABEC 7	ABEC 1	ABEC 3	ABEC 5	ABEC 7	ABEC 1	ABEC 3	ABEC 5	ABEC 7	ABEC 1	ABEC 3	ABEC 5	ABEC 7			
0	.7087	-.0003	-.0003	-.0002	-.0002	-.0050	-.0050	-.0010	-.0010	—	+0.0050	+0.0000	+0.0000	-.0020	-.0010	-.0010	—	-.0020	-.0020	-.0020
.7087	1.1811	-.0004	-.0003	-.0002	-.0002	-.0050	-.0050	-.0010	-.0010	—	+0.0050	+0.0000	+0.0000	-.0020	-.0010	-.0010	—	-.0020	-.0020	-.0020
1.1811	1.9685	-.0005	-.0003	-.0002	-.0002	-.0050	-.0050	-.0010	-.0010	—	+0.0050	+0.0000	+0.0000	-.0020	-.0010	-.0010	—	-.0020	-.0020	-.0020
1.9685	3.1496	-.0005	-.0004	-.0003	-.0002	-.0050	-.0050	-.0015	-.0010	—	—	—	—	—	—	—	—	—	—	—

Inner Ring Tolerances

Bore Diameter (d)		Tolerance							
		d +0.0000				W +0.0000			
OVER	INCL.	ABEC 1	ABEC 3	ABEC 5	ABEC 7	ABEC 1	ABEC 3	ABEC 5	ABEC 7
0	.3937	-.0003	-.0002	-.0002	-.0002	-.0050	-.0050	-.0010	-.0010
.3937	.7087	-.0003	-.0002	-.0002	-.0002	-.0050	-.0050	-.0010	-.0010
.7087	1.1811	-.0004	-.0002	-.0002	-.0002	-.0050	-.0050	-.0010	-.0010
1.1811	1.9685	-.0005	-.0003	-.0002	-.0002	-.0050	-.0050	-.0010	-.0010

BEARING TOLERANCES

The following tolerances illustrate the differences between ABEC quality classes that could affect the performance of your assembly. These tolerances should be strongly considered if a high precision gear train is your goal.

Outer Ring Tolerances

Outside Diameter (D)		Tolerance													
		Radial Runout (max.)				Width Variation (max.)		Outside Cylindrical Surface Runout with Reference Side (max.)		Groove Runout with Reference Side (max.)		Outer Diameter 2 Point Out Of Round (max.)		Outer Diameter Taper (max.)	
OVER	INCL.	ABEC 1	ABEC 3	ABEC 5	ABEC 7	ABEC 5	ABEC 7	ABEC 5	ABEC 7	ABEC 5	ABEC 7	ABEC 5	ABEC 7	ABEC 5	ABEC 7
0	.7087	.0006	.0004	.0002	.00015	.0002	.0001	.0003	.00015	.0003	.0002	.0001	.0001	.0001	.0001
.7087	1.1811	.0006	.0004	.0002	.00015	.0002	.0001	.0003	.00015	.0003	.0002	.0001	.0001	.0001	.0001
1.1811	1.9685	.0008	.0004	.0002	.00015	.0002	.0001	.0003	.00015	.0003	.0002	.0001	.0001	.0001	.0001
1.9685	3.1496	.0010	.0005	.0003	.0002	.0002	.00015	.0003	.00015	.0004	.0002	—	—	—	—

Inner Ring Tolerances

Bore Diameter (d)		Tolerance													
		Radial Runout (max.)				Width Variation (max.)		Reference Runout with Bore (max.)		Groove Runout with Reference Side (max.)		Bore 2-Point Out Of Round (max.)		Bore Taper (max.)	
OVER	INCL.	ABEC 1	ABEC 3	ABEC 5	ABEC 7	ABEC 5	ABEC 7	ABEC 5	ABEC 7	ABEC 5	ABEC 7	ABEC 5	ABEC 7	ABEC 5	ABEC 7
0	.3937	.0003	.0002	.00015	.0001	.0002	.0001	.0003	.0001	.0003	.0001	.0001	.0001	.0001	.0001
.3937	.7087	.0004	.0003	.00015	.0001	.0002	.0001	.0003	.0001	.0003	.0001	.0001	.0001	.0001	.0001
.7087	1.1811	.0005	.0003	.00015	.00015	.0002	.0001	.0003	.00015	.0003	.00015	.0001	.0001	.0001	.0001
1.1811	1.9685	.0006	.0004	.0002	.00015	.0002	.0001	.0003	.00015	.0003	.00015	—	—	—	—

METRIC CONVERSIONS & QUALITY SPECIFICATIONS

FRACTIONAL INCHES CONVERTED TO DECIMAL INCHES AND MILLIMETERS					
Fraction of Inch	Decimal of Inch	Decimal Millimeters	Fraction of Inch	Decimal of Inch	Decimal Millimeters
1/64	.015625	0.39688	33/64	.515625	13.09688
1/32	.03125	0.79375	17/64	.53125	13.49375
3/64	.046875	1.19063	35/64	.546875	13.89063
1/16	.0625	1.5875	9/16	.5625	14.2875
5/64	.078125	1.98438	37/64	.578125	14.68438
3/32	.09375	2.38125	19/32	.59375	15.08125
7/64	.109375	2.77813	39/64	.609375	15.47813
1/8	.125	3.175	5/8	.625	15.875
9/64	.140625	3.57188	41/64	.640625	16.27188
5/32	.15625	3.96875	21/32	.65625	16.66875
11/64	.171875	4.36563	43/64	.671875	17.06563
3/16	.1875	4.7625	11/16	.6875	17.4625
13/64	.203125	5.15938	45/64	.703125	17.85938
7/32	.21875	5.55625	23/32	.71875	18.25625
15/64	.234375	5.95313	47/64	.734375	18.65313
1/4	.25	6.35	3/4	.75	19.05
17/64	.265625	6.74688	49/64	.765625	19.44688
9/32	.28125	7.14375	25/32	.78125	19.84375
19/64	.296875	7.54063	51/64	.796875	20.24063
5/16	.3125	7.9375	13/16	.8125	20.6375
21/64	.328125	8.33438	53/64	.828125	21.03438
11/32	.34375	8.73125	27/32	.84375	21.43125
23/64	.359375	9.12813	55/64	.859375	21.82813
3/8	.375	9.525	7/8	.875	22.225
25/64	.390625	9.92188	57/64	.890625	22.62188
13/32	.40625	10.31875	29/32	.90625	23.01875
27/64	.421875	10.71563	59/64	.921875	23.41563
7/16	.4375	11.1125	15/16	.9375	23.8125
29/64	.453125	11.50938	61/64	.953125	24.20938
15/32	.46875	11.90625	31/32	.96875	24.60625
31/64	.484375	12.30313	63/64	.984375	25.00313
1/2	.5	12.7	1*	1.0	25.4

Gears

BERG QUALITY CLASS	AGMA 390.03	DIN SPECIFICATIONS
QA	4	12
QD	7	10
QE	8	9
QF	9	8
QG	10	7
QJ	12	5
QM	14	3

Bearings

BERG QUALITY CLASS	AGMA ABEC	ISO 492 SPECIFICATIONS
QU	5	CLASS 5
QW	7	CLASS 4

Conversion Factors

39.37 INCHES/METER	14.223	LBS/IN ²
0.3937 INCHES/CM		KG/CM ²
0.03937 INCHES/mm	1.4503 X 10 ⁴	PSI/Pascal
3.2808 FT/M	5.71 X 103	<u>LBS/IN</u>
1 X 10 ⁶ METERS/MICRON		N/M
1 X 10 ³ mm/MICRON	8.85	<u>LBS-INCHES</u>
2.2046 LBS/KG		N-M
2.204 X 10 ³ LBS/GM	0.0885	<u>LBS-INCHES</u>
3.527 X 10 ² OZ/GM		N-CM
0.0108 OZ/FT	1.416	<u>OZ-INCHES</u>
GM/M		N-CM
0.2248 LBS/N	0.0338	OZ/CC
0.102 KG/N	5.4668 X 10 ³	OZ-IN ² /GM-CM ³

AGMA - American Gear Manufacturers Association

DIN - Deutsches Institut für Normung

AFBNA - Anti Friction Bearings Manufacturers Association

ABEC - Annular Bearing Engineering Committee

ISO - International Organization for Standardization

DRILL & TAP REFERENCE DATA

MAJOR THREAD DIAMETER	PITCH		TAP DRILL DIAMETER	CLEARANCE HOLE		
	COARSE	FINE		TIGHT	NORMAL	LOOSE
1.60	0.35	0.20	1.25	1.7	1.8	2.0
2.00	0.40	0.25	1.60	2.2	2.4	2.6
2.50	0.45	0.35	2.05	2.7	2.9	3.1
3.00	0.50	0.35	2.50	3.2	3.4	3.6
3.50	0.60	0.35	2.09	3.7	3.9	4.2
4.00	0.70	0.50	3.30	4.3	4.5	4.8
5.00	0.80	0.50	4.20	5.3	5.5	5.8
6.00	1.00	0.75	5.00	6.4	6.6	7.0
7.00	1.00	0.75	6.00	7.4	7.6	8.0
8.00	1.25	7.00	6.80	8.4	9.0	10.0
10.00	1.50	1.25	8.50	10.5	11.0	12.0
12.00	1.75	1.25	10.20	13.0	13.5	14.5

METRIC DRILL LIST				
DIAMETER	DIAMETER	DIAMETER	DIAMETER	DIAMETER
0.30	0.80	1.55	2.30	3.60
0.32	0.85	1.60	2.35	3.70
0.35	0.90	1.65	2.40	3.80
0.38	0.95	1.70	2.45	3.90
0.40	1.00	1.75	2.50	4.00
0.42	1.05	1.80	2.60	4.10
0.45	1.10	1.85	2.70	4.20
0.48	1.15	1.90	2.80	4.30
0.50	1.20	1.95	2.90	4.40
0.55	1.25	2.00	3.00	4.50
0.60	1.30	2.05	3.10	4.60
0.62	1.35	2.10	3.20	4.70
0.65	1.40	2.15	3.30	4.80
0.70	1.45	2.20	3.40	4.90
0.78	1.50	2.25	3.50	5.00

MECHANICAL PROPERTIES

Mechanical Properties from “Machine Design in Mechanical Design” by Robert L. Mott

Material	Hardness (Rockwell)	Tension Modulus (E)	Tensile Strength	Yield Strength	Shear Strength	Endurance Limit
303 Stainless Steel	B75-90	28 X 10 ⁶ PSI 194 GPa	90 X 10 ³ PSI 623 MPA	35 X 10 ³ PSI 242 MPA	75 X 10 ³ PSI 517 MPA	35 X 10 ³ PSI 242 MPA
17-4 PH Stainless Steel	C28-35	28.5 X 10 ⁶ PSI 197 GPa	150 X 10 ³ PSI 1040 MPA	125 X 10 ³ PSI 865 MPA	83 X 10 ³ PSI 574 MPA	90 X 10 ³ PSI 623 MPA
416 Stainless Steel	C26-36	29 X 10 ⁶ PSI 201 GPa	75 X 10 ³ PSI 519 MPA	40X 10 ³ PSI 277 MPA	75 X 10 ³ PSI 517 MPA	40 X 10 ³ PSI 277 MPA
416 Stainless Steel - Hardened	C36-42	29 X 10 ⁶ PSI 201 GPa	135 X 10 ³ PSI 930 MPA	105 X 10 ³ PSI 725 MPA	75 X 10 ³ PSI 517 MPA	40 X 10 ³ PSI 277 MPA
12 L14 Steel	B75-90	30 X 10 ⁶ PSI 208 GPa	78 X 10 ³ PSI 540 MPA	60 X 10 ³ PSI 415 MPA	50 X 10 ³ PSI 345 MPA	-
2024T4 Aluminum	-	10.6 X 10 ⁶ PSI 73.4 GPa	68 X 10 ³ PSI 470 MPA	47 X 10 ³ PSI 325 MPA	40 X 10 ³ PSI 276 MPA	-
464 Brass Alloy	-	18 X 10 ⁶ PSI 125 GPa	57 X 10 ³ PSI 395 MPA	25 X 10 ³ PSI 173 MPA	40 X 10 ³ PSI 276 MPA	-
360 Brass Alloy	-	14 X 10 ⁶ PSI 97 GPa	49 X 10 ³ PSI 339 MPA	18 X 10 ³ PSI 125 MPA	30 X 10 ³ PSI 205 MPA	-

MILITARY SPECIFICATIONS & MANUFACTURING TOLERANCES

MATERIAL		FINISH		USED ON
MATERIAL DESIGNATION	MIL. or FED. SPECIFICATION	BERG FINISH DESIGNATION	MIL. FINISH SPECIFICATION	
303 STAINLESS STEEL (BAR)	ASTM A484 ASTM A582	—	QQ-P-35	GEARS, SHAFTS
302 STAINLESS STEEL (Spring Temp.)	MIL-W-6713 Comp. B	—	QQ-P-35	SPRINGS, RETAINER RINGS
416 STAINLESS STEEL (BAR)	ASTM A484 ASTM A582	—	QQ-P-35	RACKS-HEAT TREATABLE
440 STAINLESS STEEL (BAR)	QQ-S-763/C Class 10 Type A	CLEAR PASSIVATE	QQ-P-35	BALL BEARINGS (Hardened)
2024 ALUMINUM (BAR)	QQ-A-225/6 Cond. T4	CHROMIC ACID ANODIZED	MIL-A-8625 Type 1	GEARS, HANGERS, ETC.
2024 ALUMINUM (SHEET)	QQ-A-268 Cond. T4	BLACK ANODIZED	MIL-A-8625 Type 11	DIALS
108 ALUMINUM (CAST)	QQ-A-601 Comp. 8 Cond. T55	CHROMIC ACID OR BLACK ANODIZED	MIL-A-8625 Type 1 + Type 11	BREADBOARD COMPONENT
BRONZE (NAVAL BRASS)	QQ-B-637 Alloy 464	—	—	WORM WHEELS
BRASS-POROUS (OIL LESS)	MIL-B-5687 Type 1 Comp. A	LUBRICATED WITH S.A.E. 40 OIL	—	BEARINGS
BRASS (LAMINATED)	MIL-S-22499 Comp. 2CL.1	—	—	SHIMS
BERYLLIUM COPPER	MIL-C-6942	—	—	RETAINER RINGS
NYLON	MIL-M-20693 Type 1 Comp. A	—	—	GEARS
POLYURETHANE	—	—	—	GEARS, ROLLERS, BRG'S
PLEXIGLASS (CLEAR)	MIL-P-5425 Finish A	—	—	DIAL INDEX'S
STAINLESS STEEL CABLE	MIL-W-83420	—	—	BELTS & CHAINS
GALVANIZED ST CABLE	MIL-C-1511A-4	GALVANIZED	—	—
OIL	MIL-L-6085	—	—	GEARS & BEARINGS -65°F TO +250°F
GREASE	MIL-G-23827	—	—	GEARS & BEARINGS -65°F TO +250°F

Manufacturing Tolerances (unless otherwise specified):

0 or 1 Decimal Place = ±0.5 mm

2 or more Decimal Places = ±0.15

NOTE: Certification for materials and finishes are available on request - charges may apply.

MATERIAL SPECIFICATIONS

STAINLESS STEEL				
AISI; AA Material Designation	DIN Specs	U.S. Specs	UNS	ISO
303 Stainless Steel Rockwell B75-B90	1.4305	MIL-S-862	S30300	-
302 Stainless Steel (18-8)	1.4300	MIL-S-862	S30200	-
302 Stainless Steel - Spring Temper	-	MIL-W-6713	-	-
17-7PH Rockwell C38-C44	-	-	S17700	-
17-4PH Rockwell C32-C38	-	-	S17400	-
416 Rockwell C26 to C36	1.4005	MIL-S-862	S41600	-
416 Rockwell C36 to C42	-	-	-	-
410 Stainless Steel	1.4006	MIL-S-862	S41000	-
440 Stainless Steel	1.4112	MIL-S-763	S41003	-
420 Stainless Steel	1.4021	MIL-S-862	S42000	-
301 Stainless Steel	1.4310	MIL-S-5059	S30100	-
304 Stainless Steel	1.4301	MIL-S-862	S30400	-
316 Stainless Steel, Sintered	-	-	-	-
316 Stainless Steel, Sintered	1.4401	MIL-S-5059	S31600	-
NON-FERROUS METALS				
2024 T4 Aluminum	3.1355	-	-	AlCu4MgI
2024 T351 Aluminum	-	-	-	-
6063 T5 Aluminum	3.3206	-	-	AlMgSi
6061 T6 Aluminum	-	-	-	AlMgSiCu
Phosphor Bronze	-	-	C50500	-
Bronze, Sintered	-	MIL-B-5687	-	-
Brass, Naval, Alloy 464	-	QQ-B-637	C46200	-
713.0 Aluminum Casting, Tenzaloy	-	-	-	-
Zinc Alloy B86, AG40A (Zamak-3)	-	-	-	-
Beryllium Copper	-	MIL-C-6942	-	-
STEEL				
52100 Chrome Steel, Rockwell 062-C66	1.3505	MIL-S-980	G52986	-
12L14 Steel	1.0718	-	G12144	-
4140 Steel, Rockwell C48-C52	-	-	G41400	-
1095 Steel	-	-	G10750	-
1060 Steel Rockwell C60-C63	1.0601	MIL-S-16974	G10600	-
8620 Steel	1.6523	MIL-S-16974	G86200	-
PLASTIC				
Polyacetal				
Polyacetal, with lubricant fibers				
Polycarbonate				
Polycarbonate, Glass filled-10%, Black				

INDEX

60° V-BELTS	MA 130 - MA 132
60° V-BELT PULLEYS	MA 133 - MA 135
ANTI-BACKLASH GEARS	
PIN HUB - 1.0 MODULE	MB 38 - MB 39
PIN HUB - 0.8 MODULE	MB 53 - MB 54
PIN HUB - 0.6 MODULE	MB 62 - MB 64
PIN HUB - 0.5 MODULE	MB 78 - MB 81
PIN HUB - 0.4 MODULE	MB 98 - MB 101
PIN HUB - 0.25 MODULE	MB 122 - MB 123
PIN HUB - 0.3 MODULE	MB 113 - MB 114
CLAMP HUB - 1.0 MODULE	MB 40
CLAMP HUB - 0.8 MODULE	MB 55
CLAMP HUB - 0.6 MODULE	MB 65 - MB 66
CLAMP HUB - 0.5 MODULE	MB 82 - MB 84
CLAMP HUB - 0.4 MODULE	MB 102 - MB 103
CLAMP HUB - 0.25 MODULE	MB 124 - MB 125
CLAMP HUB - 0.3 MODULE	MB 115 - MB 116
ANTI-BACKLASH WORM GEARS	
PIN HUB - 0.5 MODULE	MB 134 - MB 135
PIN HUB - 0.4 MODULE	MB 136 - MB 137
CLAMP HUB - 0.5 MODULE	MB 138 - MB 139
CLAMP HUB - 0.4 MODULE	MB 140 - MB 141
BALLS	
MF 44	
BEARINGS	
DYNA-SPEED NEEDLE ROLLER BEARINGS	MI 25
BALL BEARINGS	MI 26 - MI 28
OIL-LESS BEARINGS	MI 29 - MI 33
LONG-LIFE® BEARINGS	MI 34
THERMOPLASTIC BEARINGS	MI 35 - MI 38
REFERENCE CHART	MI 35
SPHERICAL BEARINGS	MI 39
SPHERICAL PILLOW BLOCK BEARINGS	MI 40
THRUST BEARINGS	MI 41
ROLLER THRUST BEARINGS	MI 42
BEARING SPACERS	
MF 43	
BELT TENSIONERS	
MA 64	
BELT & CHAIN TECHNICAL DATA	
MA 136 - MA 137	
BEVEL GEARBOXES	
SHAFT SIZE 3MM, 4MM & 6MM	MC 8
BUSHINGS	
MH 2	
CAM FOLLOWERS	
MC 14	
CLAMPS	
SPLIT HUB CLAMPS	MI 6 - MI 7
SHAFT CLAMPS	MI 8
CLAMPS	MI 9
THREADED SHAFT CLAMPS	MI 10
SQUEEZE CLAMPS	MI 11
COLLARS	
SET SCREW COLLARS	MI 12 - MI 13
COUPLINGS	
GUIDE FOR COUPLING SELECTION	MG 2
TECHNICAL DATA	MG 2
SIX BEAM FLEXIBLE COUPLINGS	MG 3 - MG 8
THREE BEAM FLEXIBLE COUPLINGS	MG 9 - MG 12
SINGLE BEAM FLEXIBLE COUPLINGS	MG 13 - MG 14
ABSORBATHANE FLEXIBLE COUPLINGS	MG 15
NEO-FLEX COUPLINGS	MG 16 - MG 17
SLEEVE COUPLINGS	MG 18
SPIDER COUPLINGS	MG 19 - MG 20
MULTI-JAW COUPLINGS	MG 21
BELLOWS COUPLINGS	MG 22
OLDHAM COUPLINGS	MG 23 - MG 24
UNIVERSAL LATERAL COUPLINGS	MG 25 - MG 26
DIALS	
DRUM DIALS	MD 2 - MD 3
FLAT DIALS	MD 4
ENGRAVED FLAT DISKS	MD 5
FLAT DIAL INDEX	MD 6
DRUM DIAL INDEX	MD 6
ENGRAVED INDEX	MD 7

FLEX-E-BELT® DRIVE SYSTEM	
GEAR DRIVE BELTS	
2.5MM CIRCULAR PITCH	MA 13
2.54MM CIRCULAR PITCH	MA 16
3.325MM CIRCULAR PITCH	MA 19
E-Z ENTRY BELT PULLEYS	
PIN HUB - 2.5MM CIRCULAR PITCH	MA 15
PIN HUB - 2.54MM CIRCULAR PITCH	MA 18
PIN HUB - 3.325MM CIRCULAR PITCH	MA 21
HUBLESS - 2.5MM CIRCULAR PITCH	MA 14
HUBLESS - 2.54MM CIRCULAR PITCH	MA 17
HUBLESS - 3.325MM CIRCULAR PITCH	MA 20
FLEX-E-GEAR® CABLE DRIVE CHAIN SYSTEM	
GEAR DRIVE CHAINS	
2.50MM CIRCULAR PITCH	MA 2
2.54MM CIRCULAR PITCH	MA 6
3.325MM CIRCULAR PITCH	MA 9
SPROCKET GEARS	
PIN HUB - 2.50MM CIRCULAR PITCH	MA 3 - MA 5
PIN HUB - 2.54MM CIRCULAR PITCH	MA 7
PIN HUB - 3.325MM CIRCULAR PITCH	MA 10, MA 12
HUBLESS - 2.54MM CIRCULAR PITCH	MA 8
HUBLESS - 3.325MM CIRCULAR PITCH	MA 11
FLEX-E-GRIP® TIMING BELTS	
MA 86	
TIMING BELTS	
2MM (XXL) CIRCULAR PITCH	MA 88
5MM (XL) CIRCULAR PITCH	MA 92
9.525MM (L) CIRCULAR PITCH	MA 96
12.7MM (H) CIRCULAR PITCH	MA 98
TIMING PULLEYS	
2MM (XXL) CIRCULAR PITCH - PIN HUB	MA 89 - MA 91
5MM (XL) CIRCULAR PITCH - PIN HUB	MA 93 - MA 95
9.525MM (L) CIRCULAR PITCH - PIN HUB	MA 97
12.7MM (H) CIRCULAR PITCH - PIN HUB	MA 99
FLEX-E-PITCH® DRIVE SYSTEM	
CHAINS	
3.747MM CIRCULAR PITCH	MA 43
6.35MM CIRCULAR PITCH	MA 49
9.525MM CIRCULAR PITCH	MA 54
12.7MM CIRCULAR PITCH	MA 57 - MA 58
CHAIN SPROCKETS	
PIN HUB - 3.747MM CIRCULAR PITCH	MA 44, MA 46 - MA 48
PIN HUB - 6.35MM CIRCULAR PITCH	MA 50, MA 52 - MA 53
PIN HUB - 9.525MM CIRCULAR PITCH	MA 56
PIN HUB - 12.7MM CIRCULAR PITCH	MA 60 - MA 62
HUBLESS - 3.747MM CIRCULAR PITCH	MA 45
HUBLESS - 6.35MM CIRCULAR PITCH	MA 51
HUBLESS - 9.525MM CIRCULAR PITCH	MA 55
HUBLESS - 12.7MM CIRCULAR PITCH	MA 59
FIELD SPLICE KITS	
MA 63	
GEARBOXES - WORM WHEEL & HELICAL GEARS	
SPEED REDUCER TECHNICAL DATA	
MC 2	
GEAR RACKS	
1.5 MODULE	MB 23 - MB 24
1.25 MODULE	MB 27 - MB 28
1.0 MODULE	MB 36 - MB 37
0.8 MODULE	MB 51 - MB 52
0.6 MODULE	MB 60 - MB 61
0.5 MODULE	MB 76 - MB 77
0.4 MODULE	MB 96 - MB 97
0.3 MODULE	MB 111 - MB 112
0.25 MODULE	MB 120 - MB 121
GENEVA MECHANISMS	
MC 13	
HELICAL GEARBOXES	
SHAFT SIZE 3MM, 4MM & 6MM	MC 5
HELICAL GEARS	
1.5 MODULE	MB 126
1.0 MODULE	MB 127
0.8 MODULE	MB 128
0.5 MODULE	MB 129 - MB 130
0.4 MODULE	MB 131 - MB 132

INDEX

HEX NUTS	MF 27	
HIGH PRECISION & PRECISION LEAD SCREWS		
TECHNICAL DATA	ME2	
ANTI-BACKLASH LEAD SCREW ASSEMBLIES	ME3	
LEAD SCREWS	ME4	
HUBS		
GEAR, SPROCKET & DIAL HUBS	MI 2 - MI 4	
DUAL GEAR HUBS	MI 5	
INLINE COUPLING SLIP CLUTCHES	MG 33	
INTEGRAL SEAL SCREWS	MF 7	
INTERMITTENT MOTION ASSEMBLIES		
SHAFT SIZE 6MM	MC 12	
ISOLATION PADS	MH 3	
ISOLATION RINGS	MH 3	
KNURLED HAND CRANKS	MD 9, MD 11	
KNURLED HANDWHEELS	MD 8, MD 10	
KNOBS	MD 12	
LINEAR BEARINGS		
FLANGED TYPE LINEAR BEARINGS	ME10	
LINEAR BALL BEARINGS	ME11 - ME12, ME 14	
LINEAR BALL BEARINGS SELF-ALIGNING-BARREL STYLE	ME13	
LINEAR "NO LUBE" BEARINGS	ME15	
LINEAR SLIDES		
TECHNICAL DATA	ME5	
CROSS ROLLER SLIDES	ME6	
LINEAR BALL SLIDES	ME7	
RACK DRIVEN BALL SLIDES	ME8	
RACK DRIVEN BALL SLIDE PINIONS	ME9	
LOCK WASHERS	MF 29	
MACHINE SCREWS		
STAINLESS STEEL MACHINE SCREWS	MF 2 - MF 3	
LONG-LOK® & NYLOC® MACHINE SCREWS	MF 4 - MF 6	
MAX-M-DRIVE® CABLE DRIVE CHAINS	MA 100	
TIMING BELTS		
2MM CIRCULAR PITCH	MA 101	
3MM (HTD) CIRCULAR PITCH	MA 102 - MA 103	
5MM (HTD) CIRCULAR PITCH	MA 111 - MA 112	
TIMING PULLEYS		
3MM (HTD) CIRCULAR PITCH - PIN HUB	MA 104 - MA 110	
5MM (HTD) CIRCULAR PITCH - PIN HUB	MA 113 - MA 116	
TIMING PULLEY BAR STOCKS	MA 117	
MIN-E-PITCH® DRIVE SYSTEM		
CABLE CHAINS		
4MM CIRCULAR PITCH	MA 22	
CHAIN SPROCKETS		
PIN HUB - 4MM CIRCULAR PITCH	MA 23 - MA 27	
HUBLESS - 4MM CIRCULAR PITCH	MA 28	
DUAL CHAINS		
4MM CIRCULAR PITCH	MA 29	
BELTS		
4MM CIRCULAR PITCH	MA 30	
DOUBLE SPROCKETS		
PIN HUB - 4MM CIRCULAR PITCH	MA 31 - MA 33	
HUBLESS - 4MM CIRCULAR PITCH	MA 34	
3-D BELTS		
4MM CIRCULAR PITCH	MA 35	
3-D PULLEYS		
PIN HUB - 4MM CIRCULAR PITCH	MA 36 - MA 38	
HUBLESS - 4MM CIRCULAR PITCH	MA 39	
IDLER - 4MM CIRCULAR PITCH	MA 40 - MA 42	
MINIATURE MITER GEARBOXES		
SHAFT SIZE 3MM	MC 7	
MINIATURE SLIP CLUTCHES	MG 38	
MITER GEARBOXES		
SHAFT SIZE 3MM, 4MM & 6MM	MC 6	
OLDHAM SLIP COUPLINGS		MG 29
OVERRUNNING COUPLINGS		MG 32
PINS		
TAPER	MF 33	
ROLL OR SPRING	MF 34	
COTTER	MF 35	
DOWEL SOFT PINS	MF 36	
HARDENED DOWEL	MF 37	
POW-R-VEE® BELTS		MA 118
V-BELTS		
2V	MA 120	
3V	MA 122	
4V	MA 125	
5V	MA 127	
V-BELT PULLEYS		
2V	MA 121	
3V	MA 123 - MA 124	
4V	MA 126	
5V	MA 128	
FIELD SPLICE KITS	MA 129	
PRECISION CAPTIVE SCREWS		MF 17
PRECISION JIG BUTTONS		MF 18
PRECISION WORMS		
1.5 MODULE	MB 11	
1.0 MODULE	MB 13	
0.8 MODULE	MB 15	
0.5 MODULE	MB 17	
0.4 MODULE	MB 19	
PRECISION WORM GEARS		
1.5 MODULE	MB 12	
1.0 MODULE	MB 14	
0.8 MODULE	MB 16	
0.5 MODULE	MB 18	
0.4 MODULE	MB 20 - MB 133	
RATCHETS & PAWLS		MC 16
RETAINER RINGS		
EXTERNAL LUG DESIGN	MF 38	
INTERNAL LUG DESIGN	MF 38	
EXTERNAL SNAP ON DESIGN	MF 39	
EXTERNAL POWER GRIP DESIGN	MF 39	
EXTERNAL BOWED SNAP ON DESIGN	MF 40	
EXTERNAL DESIGN	MF 40	
ROLLER BEARING CAM FOLLOWERS		MC 15
ROLLER CLUTCHES		MG 40
ROW-L-ER® CHAINS		MA 65
LINK CHAINS		
3.75MM CIRCULAR PITCH	MA 66	
6.35MM CIRCULAR PITCH	MA 73, MA 79	
9.53MM CIRCULAR PITCH	MA 82	
12.7MM CIRCULAR PITCH	MA 84	
SPROCKETS		
PIN HUB - 3.75MM CIRCULAR PITCH	MA 67, MA 69 - MA 71	
PIN HUB - 6.35MM CIRCULAR PITCH	MA 75 - MA 77, MA 80 - MA 81	
PIN HUB - 9.53MM CIRCULAR PITCH	MA 83	
PIN HUB - 12.7MM CIRCULAR PITCH	MA 85	
HUBLESS - 3.75MM CIRCULAR PITCH	MA 68, MA 72	
HUBLESS - 6.35MM CIRCULAR PITCH	MA 74, MA 78	
SERVO GEARBOXES		
SHAFT SIZE 3MM	MC 9	
SHAFT SIZE 4MM	MC 10	
SHAFT SIZE 6MM	MC 11	

INDEX

SET SCREWS

SLOTTED HEAD & HEX SOCKET	MF 8
BRASS SOFT TIP HEX SOCKET	MF 9
SILVER SOLDER TIP SLOTTED HEAD & HEX SOCKET	MF 10
SOFT TIP SOCKET HEAD	MF 11 - MF 12

SHAFTS

CASE HARDENED GROUND SHAFTS	MI 14
STAINLESS GROUND SHAFTS	MI 15, MI 19 - MI 24
GROUND SHAFTS	MI 16
SHAFT SEALS	MI 17
SHAFT ADAPTERS	MI 18

SHAFT ADAPTERS

MG 29

SHOULDER SCREWS

SLOTTED HEAD	MF 13 - MF 14
HEX SOCKET HEAD	MF 15 - MF 16

SLIP CLUTCHES

MG 34 - MG 37

SLIP CLUTCHES & COUPLINGS

MG 39

SLIP COUPLINGS

MG 29 - MG 31

SPACERS

INNER RACE SHIM	MF 41
OUTER RACE SHIM	MF 41
SHAFT SPACERS	MF 42

SPRINGS

COMPRESSION	MF 45 - MF 46
EXTENSION - FULL TWIST LOOPS CLOSE WOUND	MF 46
TORSION LEFT HAND WOUND	MF 47

SPRING WASHERS

BELLEVILLE	MF 31
CURVED	MF 31
BEARING PRE-LOADED	MF 32

SPUR GEARS

HUBLESS - 1.5 MODULE	MB 21
HUBLESS - 1.25 MODULE	MB 25
HUBLESS - 1.0 MODULE	MB 29 - MB 30
HUBLESS - 0.8 MODULE	MB 41 - MB 44
HUBLESS - 0.5 MODULE	MB 67 - MB 68
HUBLESS - 0.4 MODULE	MB 85 - MB 86
HUBLESS - 0.3 MODULE	MB 105
HUBLESS - 0.25 MODULE	MB 117
PIN HUB - 1.5 MODULE	MB 2
PIN HUB - 1.25 MODULE	MB 3
PIN HUB - 1.0 MODULE	MB 4, MB 31 - MB 34
PIN HUB - 0.8 MODULE	MB 5, MB 45 - MB 48
PIN HUB - 0.6 MODULE	MB 6, MB 56
PIN HUB - 0.5 MODULE	MB 7, MB 69 - MB 75
PIN HUB - 0.4 MODULE	MB 8, MB 87 - MB 92
PIN HUB - 0.3 MODULE	MB 9, MB 106 - MB 108
PIN HUB - 0.25 MODULE	MB 10, MB 118
CLAMP HUB - 1.5 MODULE	MB 22
CLAMP HUB - 1.25 MODULE	MB 26
CLAMP HUB - 1.0 MODULE	MB 35
CLAMP HUB - 0.8 MODULE	MB 49 - MB 50
CLAMP HUB - 0.6 MODULE	MB 57 - MB 59
CLAMP HUB - 0.4 MODULE	MB 93 - MB 95
CLAMP HUB - 0.3 MODULE	MB 109 - MB 110
CLAMP HUB - 0.25 MODULE	MB 119

SPUR GEAR STOCKS

0.4 MODULE	MB 104
------------------	--------

SYNCHRO MOUNT CLAMPS

MD 13 - MD 16

TELESCOPIC UNIVERSAL JOINTS

MG 28

THREADED STUDS

MF 25 - MF 26

THRUST WASHERS

MF 30

THUMB NUTS

MF 24

THUMB SCREWS

PLASTIC HEAD, KNURLED	MF 19 - MF 20
STRAIGHT KNURLED	MF 21 - MF 22
KNURLED SOCKET HEAD	MF 23

UNIVERSAL JOINTS

MG 27

WASHERS

MF 28

WORM & WORM WHEEL GEARBOXES

SHAFT SIZE 3MM, 4MM & 6MM	MC 3 - MC 4
---------------------------------	-------------